

ADA Compliant  
Detectable Warnings

|   | Detectile Slimtek-II <sup>New!</sup><br>Lightweight Composite Tiles | Detectile Duratek<br>Heavy Duty Composite Tiles |
|---|---|---|
| Ultra-lightweight engineered design                         | ✓   |   |
| Ultra-slim profile for quick and easy installation          | ✓   |   |
| Engineered for extra durability for high-traffic areas      | ✓   | ✓   |
| Ultra high compressive strengths                            | ✓   | ✓   |
| Easily replaceable  | ✓   | ✓   |
| Impervious to water, and salt, chemical and stain resistant | ✓   | ✓   |
| UV Resistant with UV stabilizers                            | ✓   | ✓   |
| High impact reinforced domes                                | ✓   | ✓   |
| Advanced anti-slip tread system                             | ✓   | ✓   |
| Cast-in-place installation                                  | ✓   | ✓   |
| Excellent freeze-thaw resistance                            | ✓   | ✓   |
| Easy to install flat back panel                             | ✓   | ✓   |

**Please visit  
www.detectile.com  
for additional information**

- Complete Specifications
- Installation Instructions
- ADA Guidelines


**Detectile Corporation**

Tel 630.734.0277  
Fax 630.734.0278  
For more information please call

Andy Watne  
Sales Manager  
312-213-1507  
watne@detectile.com

**Limited Warranty**

Detectile warrants its products to be free from manufacturing defects for a period of 5 years from the date of purchase. Detectile will supply new products to replace the defective products during this warranty period. This warranty is limited to products which are installed properly and used according to Detectile's written instructions. Such product replacement shall constitute the sole and exclusive remedy for any claim under this warranty. This warranty is in lieu of all other warranties, expressed or implied. Detectile makes no warranty of merchantability or suitability of its products for any particular purpose. Detectile disclaims all liability for incidental, consequential or indirect damages or losses of any kind arising out of the use of these products.

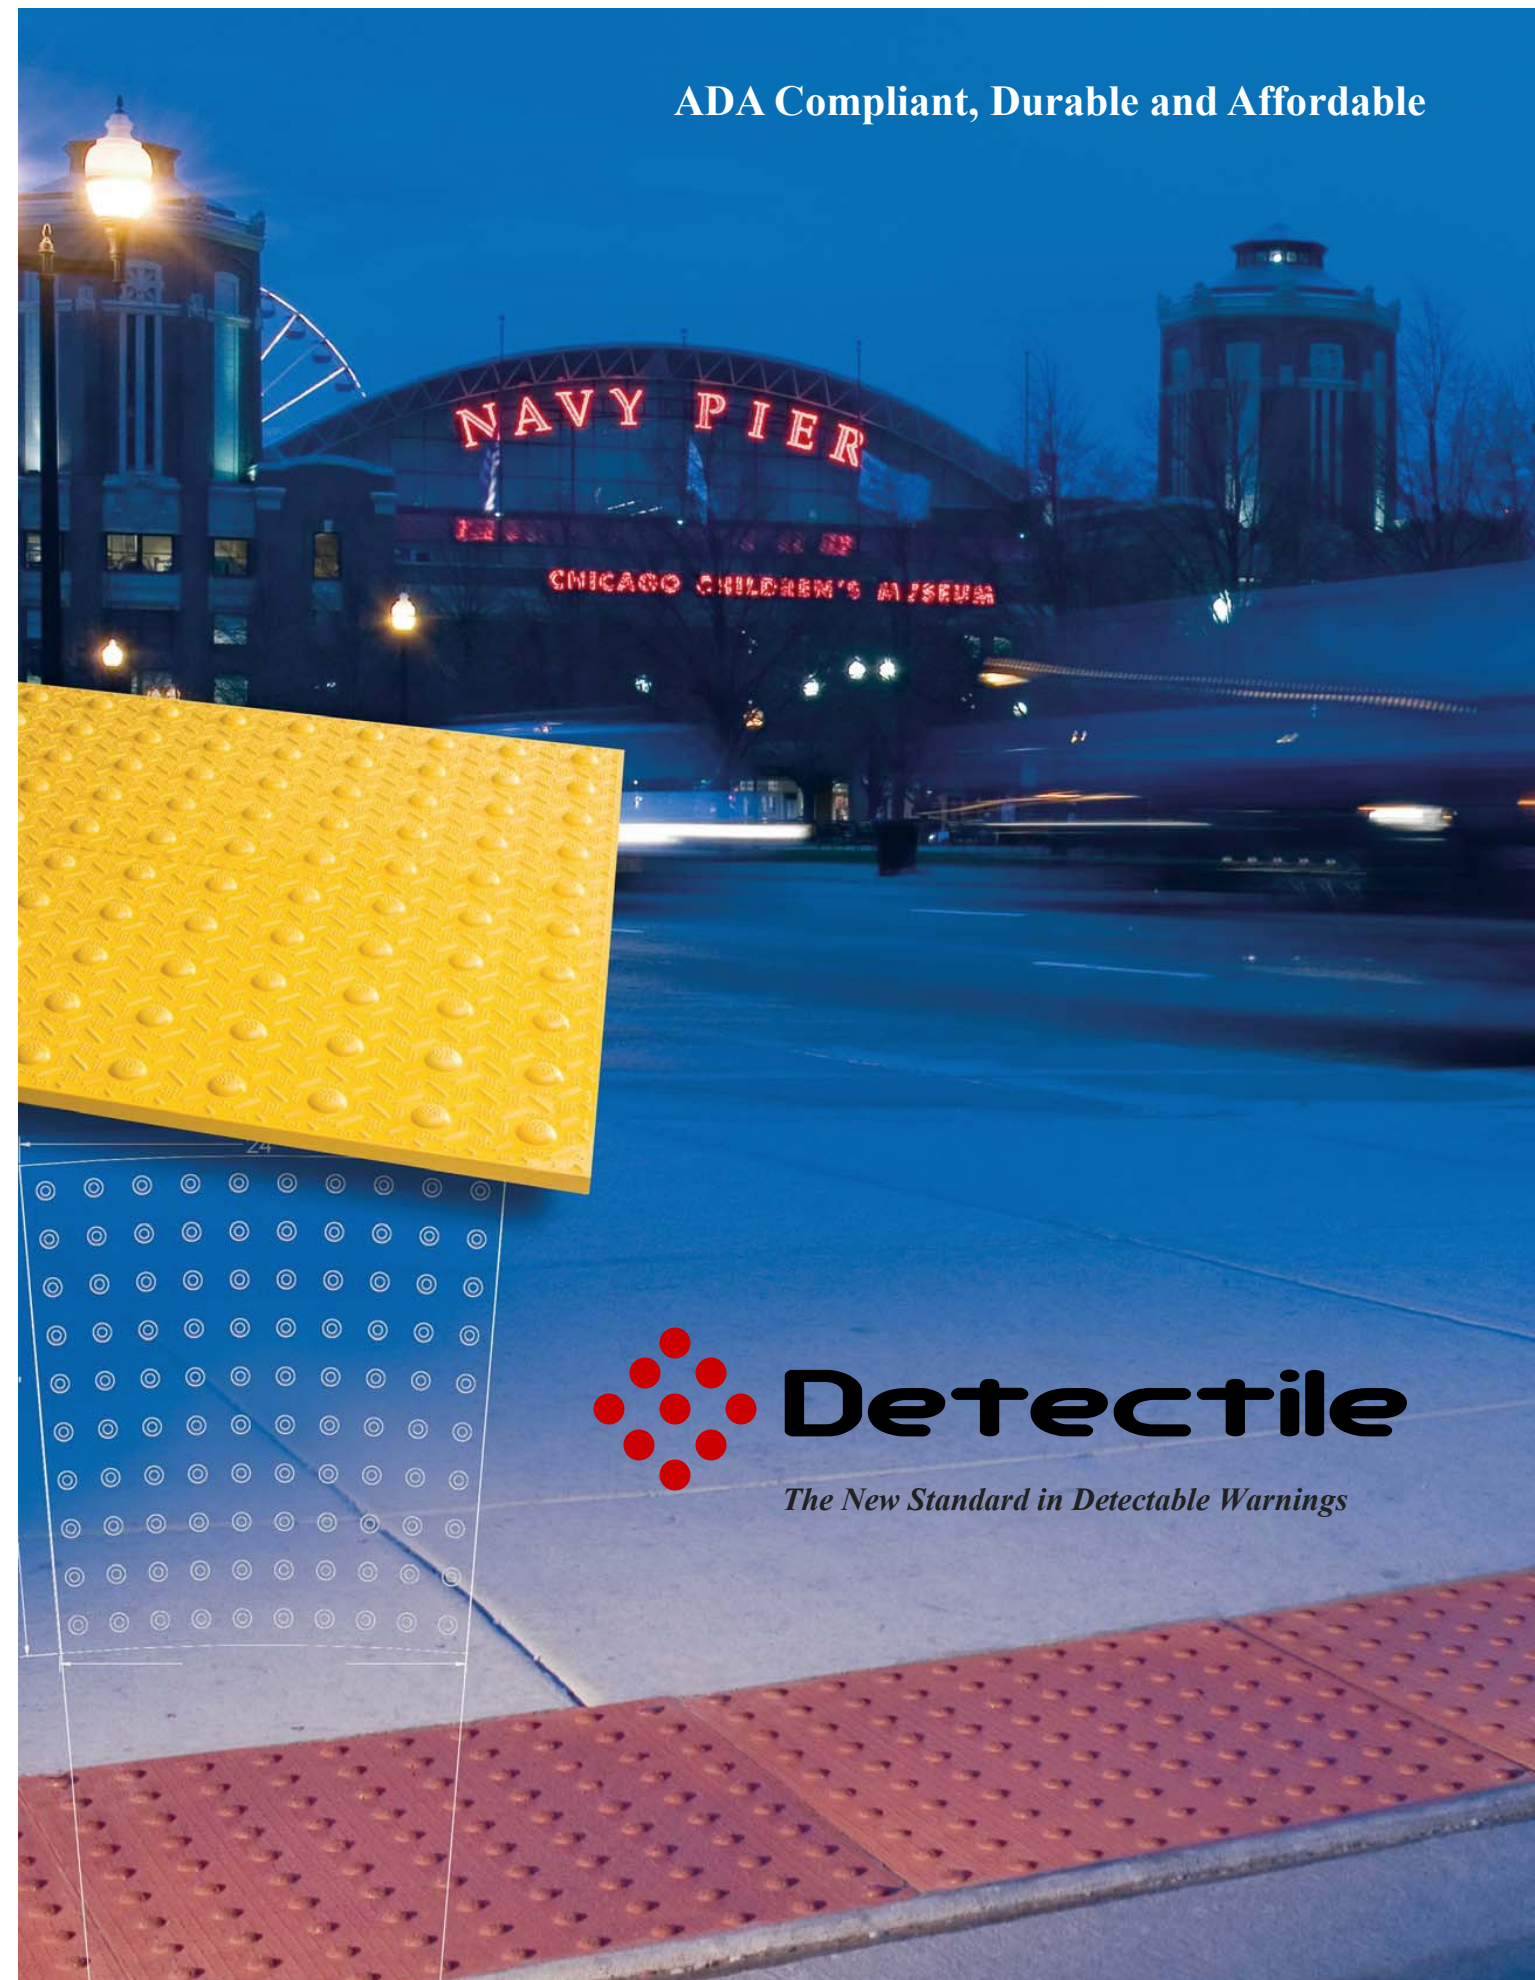

## The Performance Leader


Detectile is the world's leading manufacturer of solid plate composite detectable warnings. Our products are quicker to install, longer lasting, and less expensive than traditional detectable warnings.

## ADA Compliance




Detectile products meet or exceed all ADA and FWHA requirements for tactile warning surfaces.

## Applications

- Curb Ramps and Pedestrian Crossings
- Transit Platforms and Bus Stops
- Store Entrances
- Parks and Recreational Areas
- Building Access Areas
- Temporary ADA Ramps

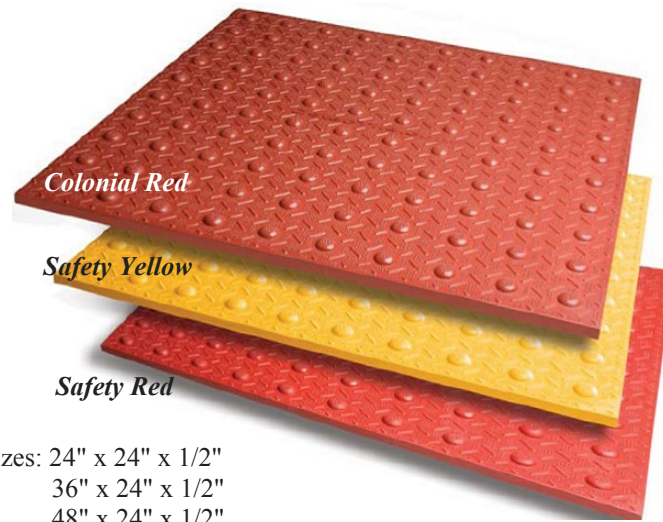

Stock Sizes: 24" x 24" x 1/2"  
36" x 24" x 1/2"  
48" x 24" x 1/2"  
Call for other sizes

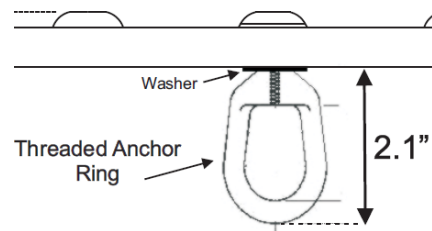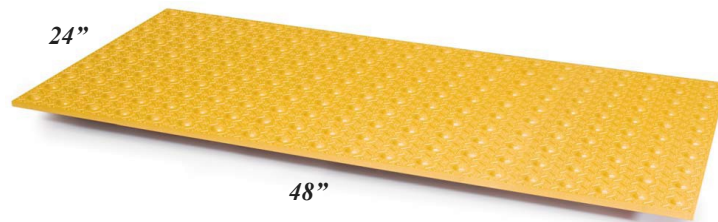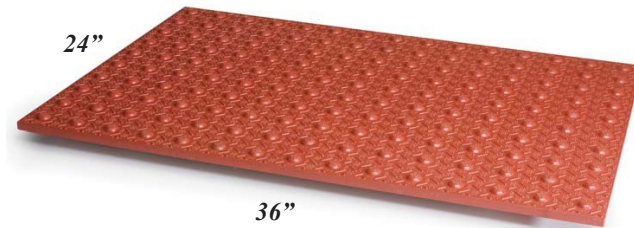

## Replaceable Design



- Firmly secured by high strength anchors.
- Replaceable without breaking out the underlying concrete.

Threaded Anchor System



## Easy Installation

- Slimtek and Duratek tiles can be efficiently installed.
- Easily pressed (wet-set) into freshly poured concrete.

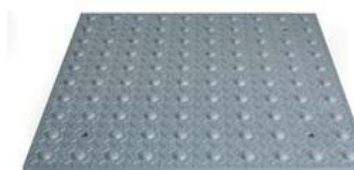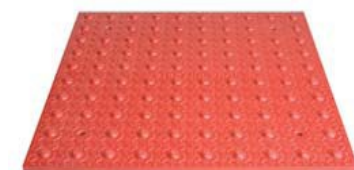

Other Certified FS 595B Federal colors are available.

## Slimtek II Redesigned!

Cost-effective, ultra-light cast in place detectable warnings

**Ultra-light** - light-weight engineered design

**Easy Installation** - slim profile with flat back panel for quick and easy installation in just minutes

**Replaceable** - anchor system allows for quick and easy tile replacement

**Durable** - engineered lightweight design retains durability



## Duratek

Heavy duty 1/2 inch thick detectable warnings engineered for extra durability

**Ultra-Durable** - engineered for extra durability. Ideal for high traffic areas

**Strong** - ultra-high compressive strength and impact resistance

**Replaceable** - anchor system allows for quick and easy tile replacement



## ASTM Test Results\*

|                              |  |
|------------------------------|--|
| <b>Compressive Strength:</b> | > 27,400 psi (ASTM D 695-02a)  |
| <b>Water Absorption:</b>     | 0.07 % 24 hr (ASTM D 570-98)   |
| <b>Impact Resistance:</b>    | 488 in-lb without concrete backing (ASTM D5420-04 GE)                |
| <b>Salt Spray:</b>           | (Fog) 430 hrs no deterioration, no fading (ASTM B117)                |
| <b>Slip Resistance Dry:</b>  | .87 Wet: .82 (ASTM C1028-96)   |
| <b>Wear Resistance:</b>      | 0.002-0.004" loss, 1000 cycles, 1000g load, H22 wheel (ASTM C501-84) |

\* ASTM results for Duratek tiles.

\*\* Call us for a complete list of test results.